
STANDARD TYPE (UP TO 20 FEET IN DEPTH)


STANDARD MANHOLE RING AND COVER TOP DESIGNED FOR **STANDARD HS-20 LOADING MAY** STEPS 16" ON BE FLAT OR CENTER **ECCENTRIC CONE** MINIMUM UP TO 20'-0" PLASTIC CEMENT PUTTY OR BUTYL **RUBBER JOINTS BRICK AND** MINIMUM 6" THICK WASHED MORTAR INVERT STONE BEDDING

FLAT TOP DETAIL



"NOT TO SCALE"

<u>DEEP TYPE</u> (OVER 20 FEET IN DEPTH)

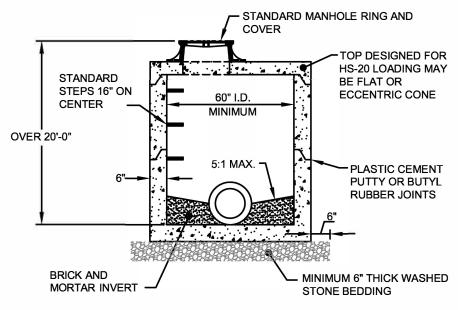

FLAT TOP DETAIL

